

### Application:

Apogee's Matrix ceramic filters are ideal for steel investment casting. These filters have a very high thermal shock resistance, high resistance to chemical/slag attack and excellent high temperature creep resistance. The maximum application temperature for our ceramic matrix filters is 1600°C/2912°F.

### Molten Metal Filtration:


Apogee's ceramic matrix filters are designed for use with all types of steel to prevent non-metallic inclusions. They have a consistent and repeatable structure to ensure that each and every filter will have the same flow characteristics. The design of OPTIFLO Matrix filters ensures effective inclusion capture. In addition a tortuous path through the filter virtually eliminates turbulence in the molten metal stream. This reduces the chance of inclusions being generated from re-oxidation of the molten metal.



## Optiflo MM: Ceramic Matrix Filter Technical Data Sheet

### Filtration Efficiency:

Apogee's filters can be positioned in the pouring cup. They can be made with a straight edge or with a taper to suit any pouring cup design. Filtration efficiency is dependent on the correct application and positioning of the filter. Apogee's Technical Sales teams are able to provide technical support for the design of gating systems. For optimal filter efficiency it is recommended that the filter is positioned correctly and sized according to our guidelines.

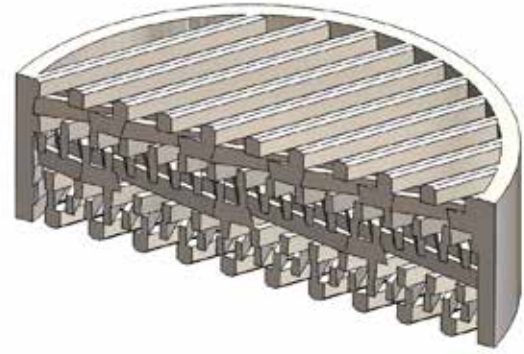

### Filtration Benefits:

The use of Apogee's Ceramic Matrix filters has significant benefits that can be seen throughout the foundry process. Some of the notable benefits include:

- Non-friable.
- Regular and repeatable engineered filter structure.
- Customizable to accommodate customer required flow rates.
- Casting quality improvements with improved surface finish, casting cleanliness.
- Excellent priming performance.
- Excellent thermal shock and chemical attack resistance.
- Excellent flow modification and filtration efficiency.
- Improved mechanical properties due to cleaner metal and reduced internal defects.
- Lower scrap costs by reducing scrap levels.
- Reduced casting machining costs.
- Higher Production yield per tonnage of metal melted due to simplified gating systems.
- Reduced machining costs due to reduced tool wear.
- Reduced inspection costs - destructive and non-destructive.

## Physical Properties:

Material Composition	Mullite
Maximum Operating Temperature (°C/F)	≤1600°C / ≤2912°F
Color	White
Available Matrix Size (mm)	2mm, 3mm, 4mm
Available Strut Width (mm)	1mm



## Dimensions:

Apogee's Ceramic Matrix filters can be produced in the following dimensional range:

- **Length/Diameter:** 60mm to 150mm
- **Width:** 60mm to 150mm
- **Thickness:** 20mm to 40mm
- **Dimensional Tolerances:** ±1.0mm for filters under 100mm  
±2.0mm for filters above 100mm

# Optifo MM: Ceramic Matrix Filter Technical Data Sheet

## Flow Capacity:

General filter capacity calculations.

- **Carbon Steel:** Maximum Filtration Weight (kg)  
= Filter area (cm<sup>2</sup>) x 2

Example: 50 x 50 x 25mm

Filtration capacity is 5 x 5 x 2 = 50kg

- **Stainless Steel:** Maximum Filtration Weight (kg)  
= Filter area (cm<sup>2</sup>) x 3

Example: 50 x 50 x 25mm

Filtration capacity is 5 x 5 x 3 = 75kg

Typical Filter Dimension (mm)	Maximum Pour Weight (kg)		Suggested Flow Rate Range (kg/s)	
	Carbon	Stainless	Carbon	Stainless
50 x 50 x 25	60	85	4.0 - 6.0	6.5 - 10.0
75 x 75 x 25	113	169	9.0 - 13.5	14.6 - 22.5
100 x 100 x 25	200	300	16.0 - 24.0	26.0 - 40.0
50 x 25	39	59	3.1 - 4.7	5.1 - 7.9
75 x 25	88	133	7.1 - 10.6	11.5 - 17.7
100 x 25	157	236	12.6 - 18.9	20.4 - 31.4

NOTE: Above capacity and flow rate figures are for reference only. Metal type and gating system will dictate the final values for each size of filter.

**Apogee**  
ceramics inc.